


8OWUDVRIW 5HFRYHU\ %ULGJH



3, 11, 1*

3, 1	'(6&5,37,21
	, Q S X V A A Q
	, Q S X V A A Q
	2 X W S X W \$ Q A R G H
	2 X W S X W & A W K R G H


) HDWXUHV
 ‡* OD 5 DVVLY 8 DWL 5 G F W L R Q
 ‡5HYH 9 R 10 W D J H 9
 ‡) R U Z D X G U H Q W
 ‡+ L J X U & X U U & H Q W E L O L W \
 ‡' H V L J Q R G X U I D R X \$ S S O L F D W L R Q
 % H Q H I L W V
 ‡ & D V H .
 ‡ 7 H U P L G R O G H 3 B B 0 H 6 7'

0D[LPXP 5DWLQ 00G H F W E K B D O F W H U L V W L F V


5DWLQ V f & D P E W H P S H U D Q D X U M K H U Z S H F L I L H G
 6LQJOH SKDVH K Q U H Z D V M U Q G X F O R D G H E D S D F L W E X H U G R O G W H

3DUDPHWHU	6\PEROV	: 5 * % 3	8QLWV
0D[LPXP 5 H S H W L W L Y H 3 H D N 5 9 5 4 D U V H 9 R O W D J H	9506		9
0D[LPXP 506 YROWDJH			9
0D[LPXP '& %ORFNLQJ 9ROWDJH &			9
\$YHUDJH 5HFWLILHG 2XWSXW &RUUHQW			\$
5HYHUVH 5HFRYHU\ 7LPH ,) \$,5 \$,55 \$	7UU		XV
3HDN)RUZDUG 6XUJH &XUUHQW PV 6LQJOH +DOI 6LQH :DYH 6XSHULPSRV, H G R Q 5DWHG /RDG -('(& 0HWKRG			\$
, WUDW E O X V L Q B V W P V	, W		\$ 6
0D[LPX)RUZDUG WDW H \$	9)		9
0D[LPXP '& 5HYHUVH &XUUHQW #7\$ f & DW 5DWHG '& %ORFNLQJ 9ROWDJH #7\$ f &			\$
7\SLFDO -XQFWLR Q 18DVA D FLWD Q & M H			S)
2SHUDWLQJ DQG 6WRUDJH 7H P S T W D W X U H 5 D Q J H a			f &
1RWH0HDVX D M G +] D Q G S S O L H H Y H Y U R G H V R D J H & 0R X Q W H G R Q J O D V V H S R X \ 3 & E " R (D U G < Z L W K P) F R S S H U S D G			


5 \$ 7 , 1 * 6 \$ 1 ' & + \$ 5 \$ & 7 (5 , 6 7 , & 6 & 7 5 9 (6 X Q O H V V R W K H U Z L V H Q R W H G

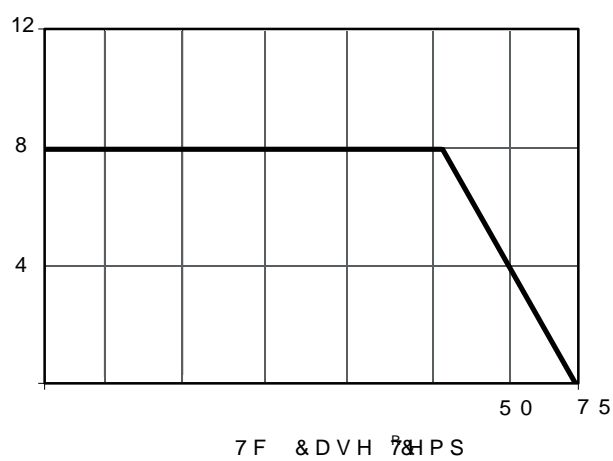

Current Derating, Case

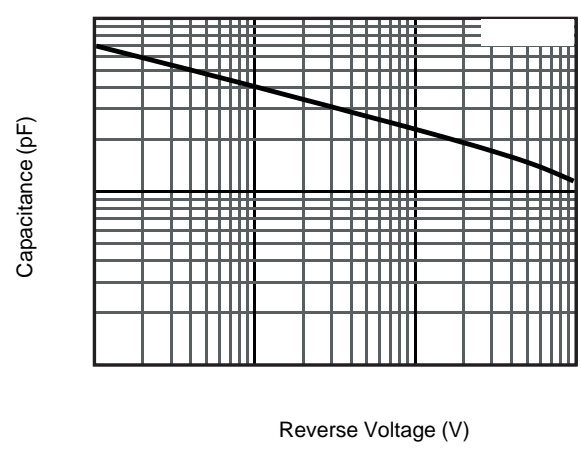


Typical Junction Capacitance

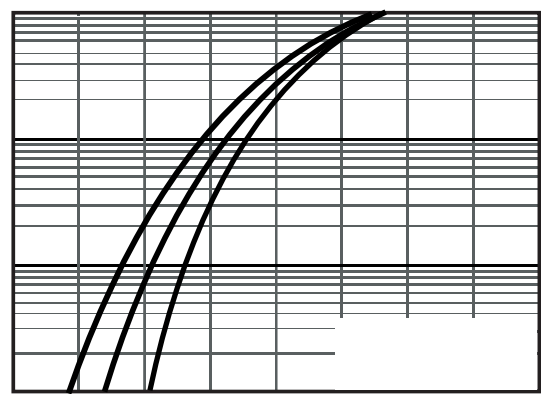

Typical Forward Voltage

Typical Reverse Current

3 \$ & . \$ * (2 8 7 / , 1 (' , 0 (1 6 , 2 1 6

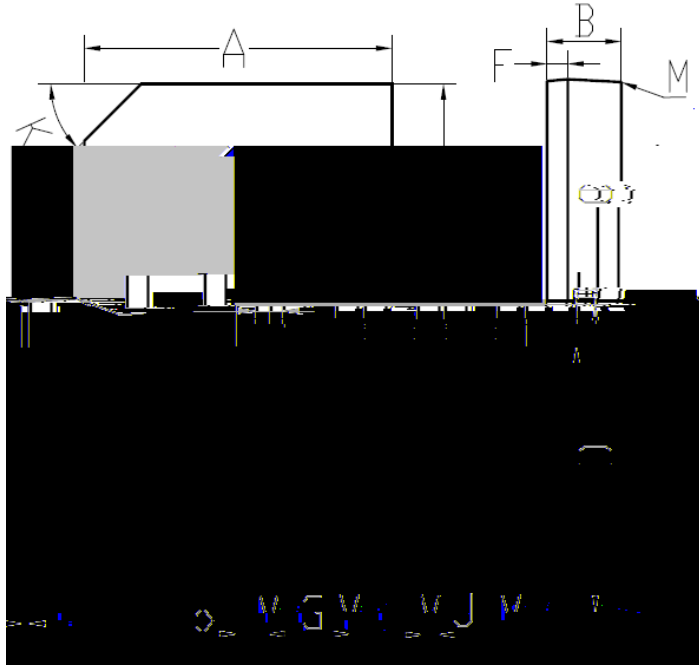

' , 0	0 , 1	0 \$;
\$		
%		
&		
'		
G		
(
)		
*		
+		
,		
-		
.	[f	5 Z Q
/		f
0		f
\$ 0 0 ' L P H Q V L R Q V L Q P L O D L P H W H U		