




RATINGS AND CHARACTERISTICS CURVES

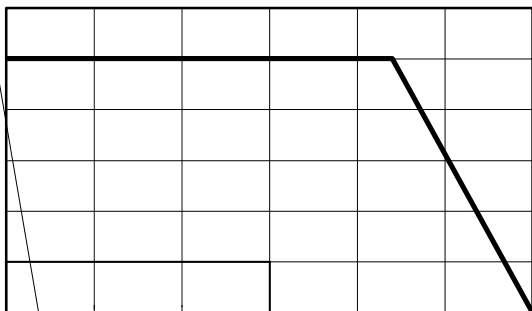


Current Derating, Case

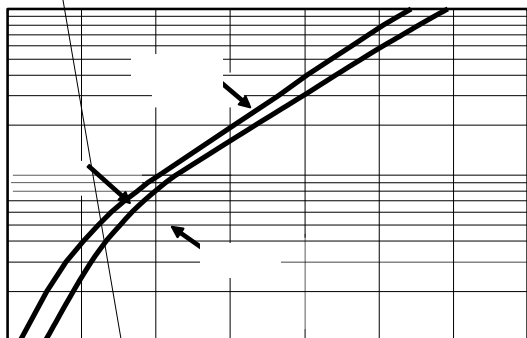

Typical Forward Voltage

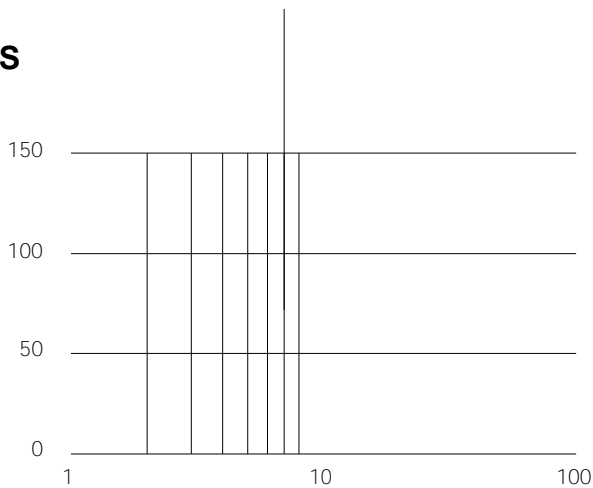

Maximum Repetitive Surge Current

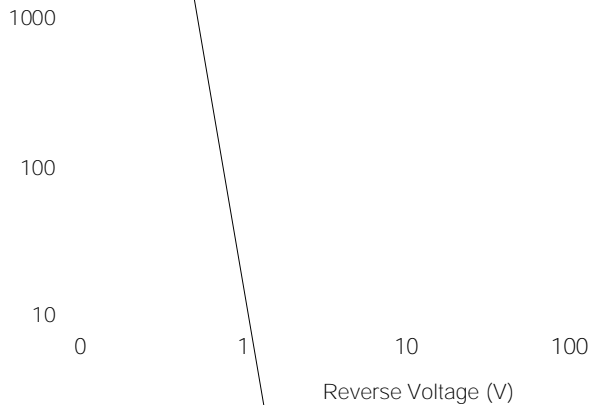

Typical Junction Capacitance


Typical Reverse Current

829 m 189.35 0 | S Q7.2 0 0 1 341.4620361 6



()

PACKAGE OUTLINE DIMENSIONS

DO-201AD

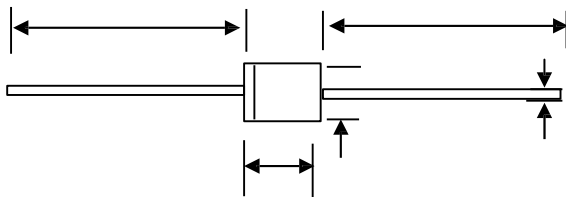

| | | | | 1.4 | |
|--|--|--|--|-----|--|
| | | | | 1.1 | |
| | | | | .1 | |
| | | | | | |

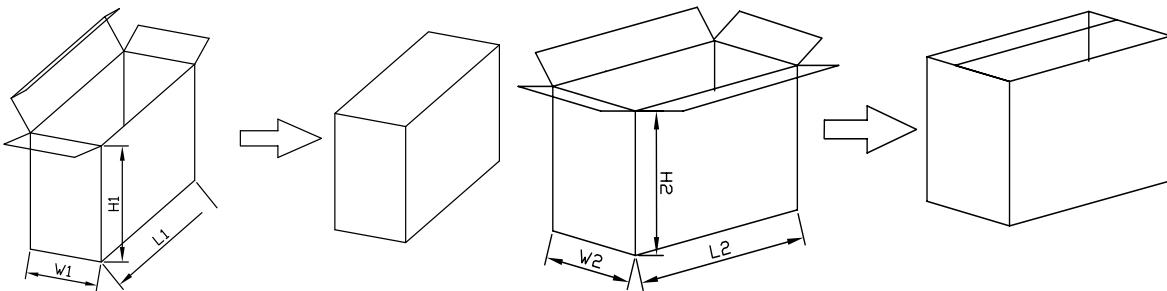

| | | | | 4 | 4 | | |
|--|--|--|--|---|---|--|--|
| | | | | | | | |
| | | | | | | | |