



F




RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

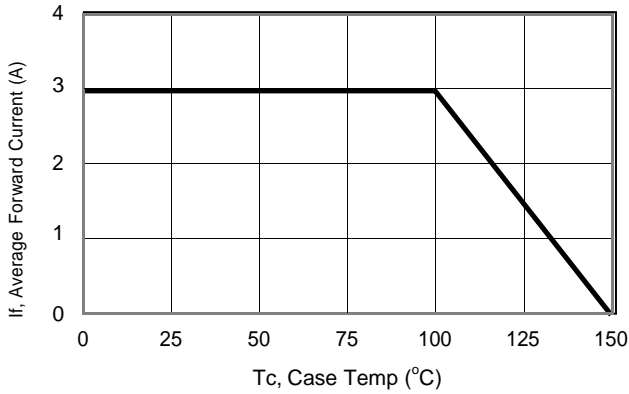


Current Derating, Case

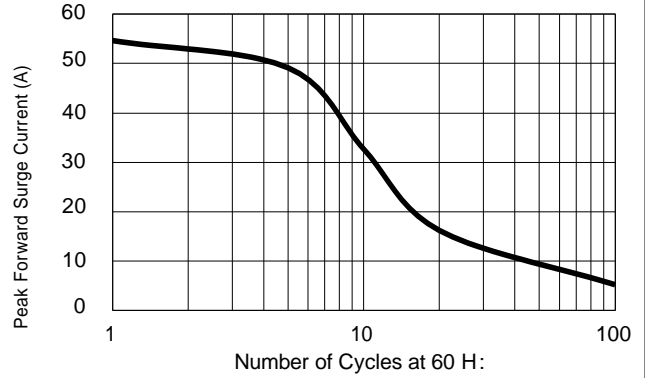


Maximum Repetitive Surge Current

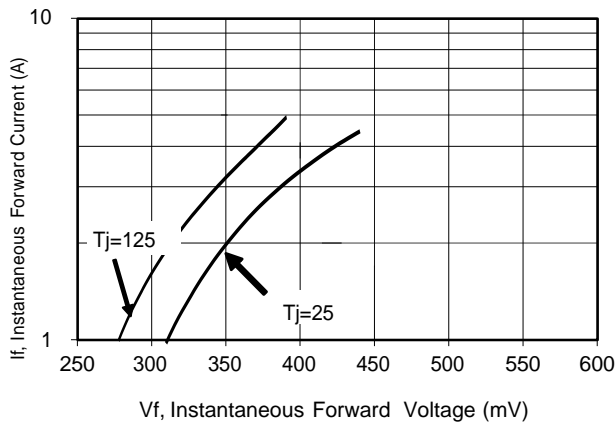

Typical Forward Voltage

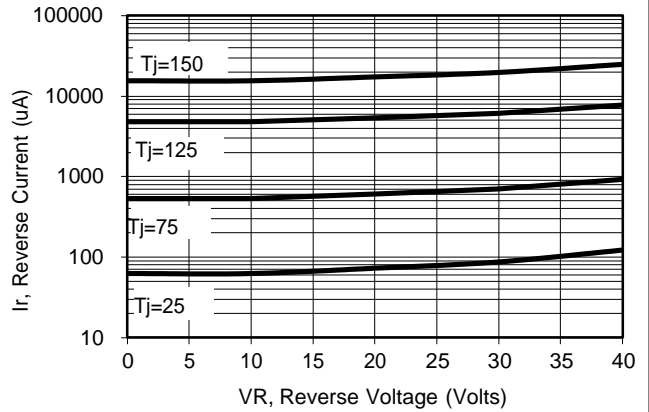

Typical Reverse Current

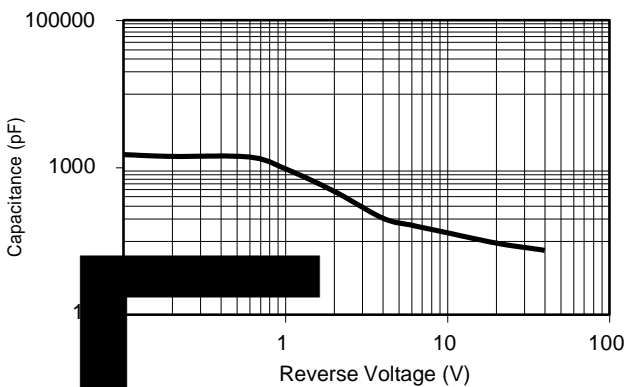

Junction Capacitance

MA

763 / \$)

129 9

PA... DIMEN



R0



F

CF

763 \$) 5HY 2

3

- ①
- ②

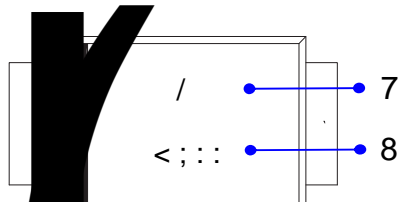

3DF JLQJ QIRUPDWLRQ

