




TO-220AB
TSR / & 7



ITO-220AB
TSR / & 7)


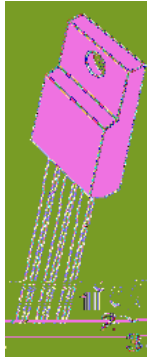


Features


- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDYGWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &RPSOLDQW

RATINGS AND CHARACTERISTICS CURVES


f & X Q O H V Q R W K B U Z L V H

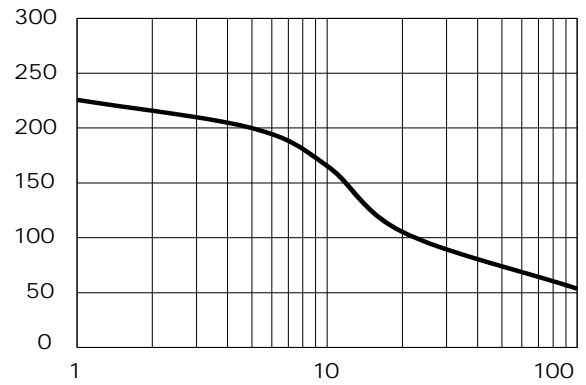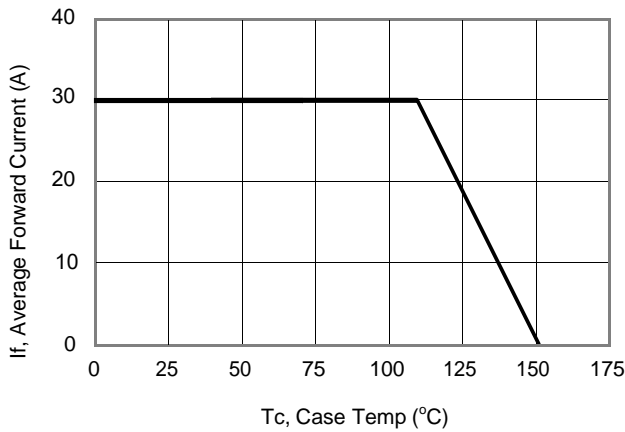

Current Derating, Case

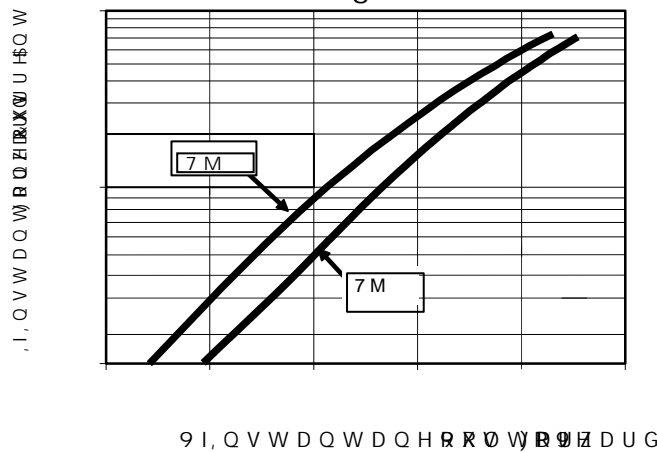


Maximum Repetitive Surge Current

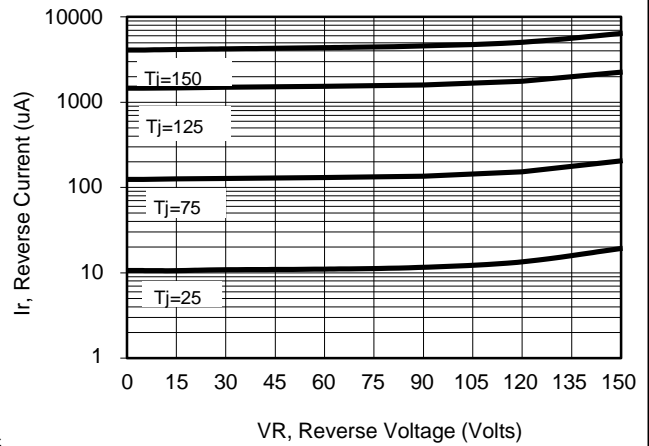


d Ç %o& } (EoAs } (E š P

Typical Reverse Current

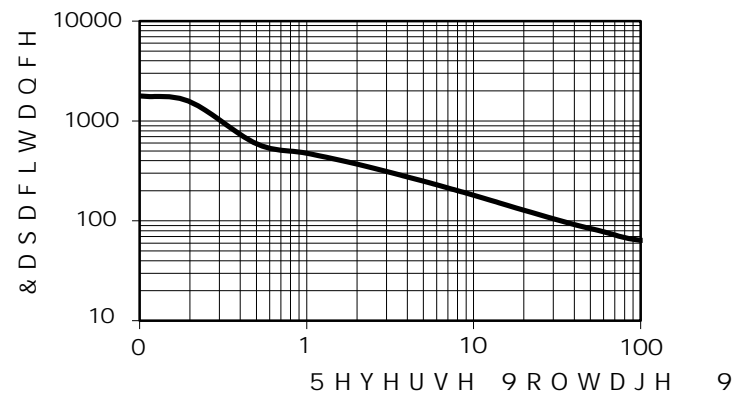


Typical Junction Capacitance


PACKAGE OUTLINE DIMENSIONS

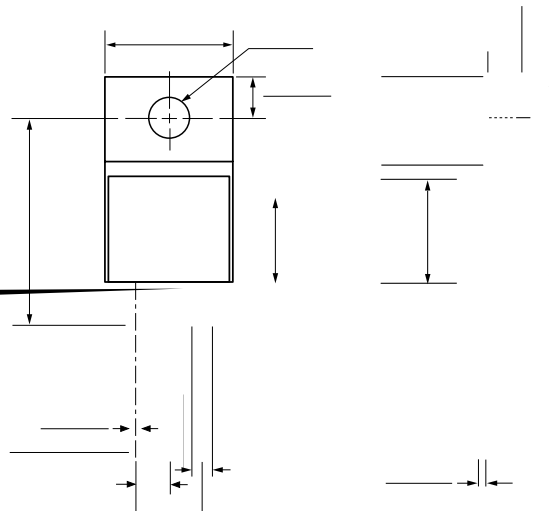

Marking Information

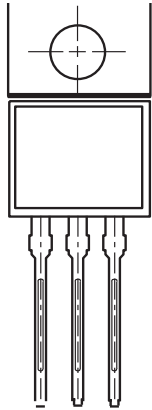


3 URGXFW 765 GHQ & 7 RU 7 6/5 & 7)
 3' & LQIRUPDWLRQ

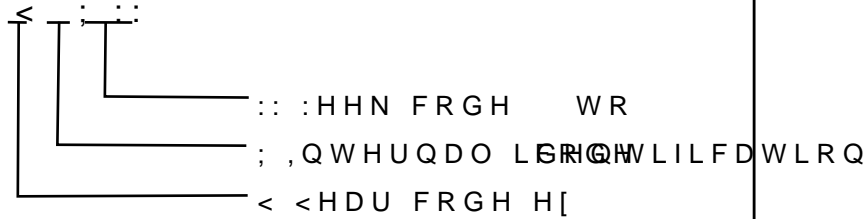

Packaging Information

7XEH 'LPHQVLRQV

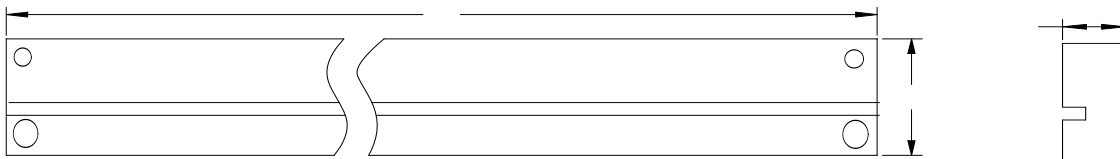

, QVLGH %R[

2XWVLGH %R[

Packaging Information

12	81,	7XEH 'LPHQVLR			, QVLGH %R[2XWVLGH %R[
6 LH	PP	\$	%	&	/	:	+	/	:	+
47 <	3 & 6	3 & 6 7XEH			6PDO SHFWDJH3 & 6 WXEWRWDO			3 & 6 FDUERGLWRWDO		
1 RW	H	7ROHUDQFH PP " PP			PP " PP			PP " PP		