

7 UHQFK 026 %DUULHU 6FKRWWN\ 5H


d^Wîisîî  
dKrîñî

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURGDWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

ï

1



Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡ )UHHZKH'HLRGLJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)





3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUGUFXWUHQWGHYLFH ) \$9				\$
3HDNIRVZDURUHQWVLCDDHQHZDYH ) 60				\$
2SHUDMXQDURQWRUDJHWHPSHUDWXUH70D*QJH WR				f&
7\SLFVCHUPDOUSHVULVQHDQFH 72		5\$-\$		f& :
,QVWDQWDQHRURWRUJZDUGSHGLRGH	,) \$ 7- f&	9)	7<3	9
	,) \$ 7- f&		0\$;	
	,) \$ 7- f&			
	,) \$ 7- f&			
,QVWDQWDQHRXUUSHVULVQHDQFHUDWHYHYURQWDJH	7- f&	,5		X\$
	7- f&			P\$

1RWHV

3XOVHWHVVSXOVHZLGWK GXW\F\FOH

3XOVHWHVW 3XOPVHZLGWK 0

RATINGS AND CHARACTERISTICS CURVES

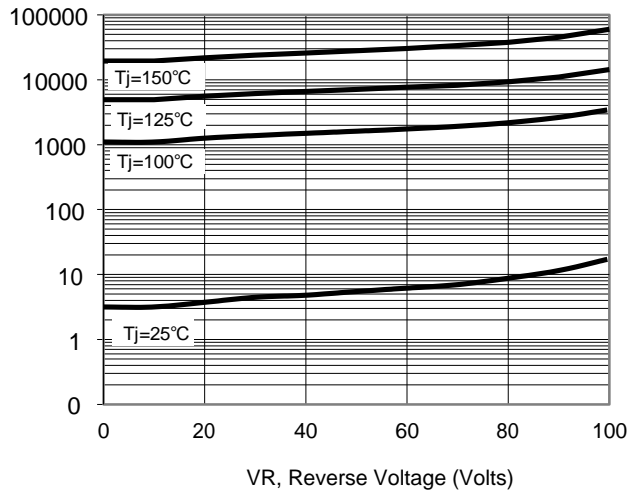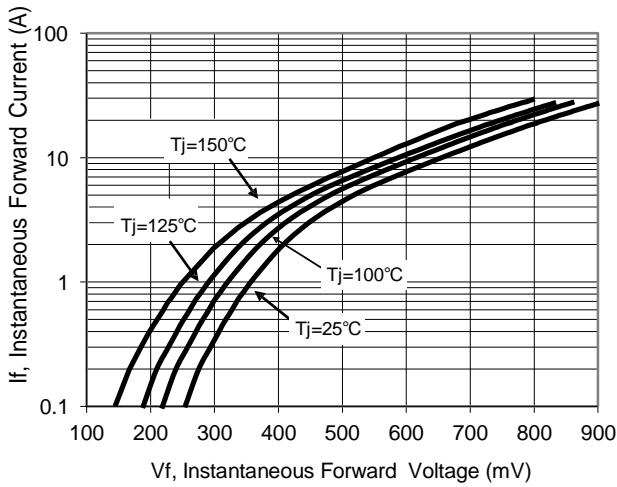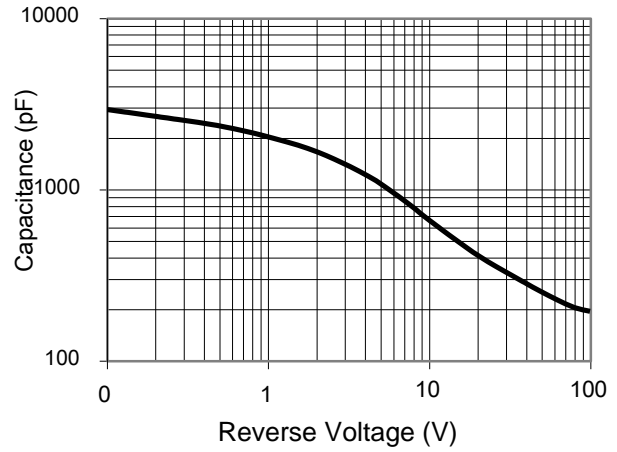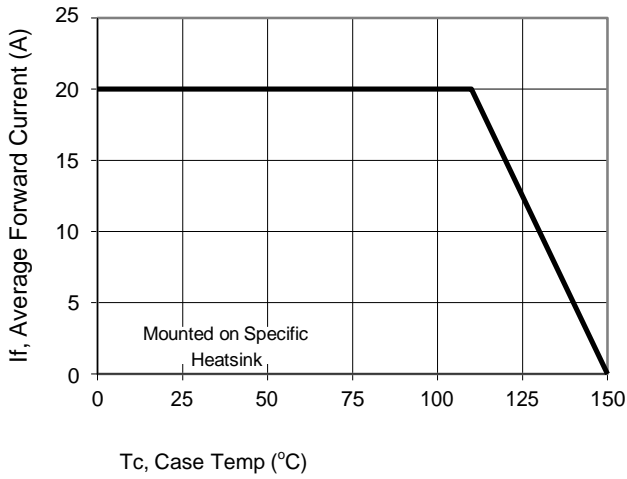

PACKAGE OUTLINE DIMENSIONS

1 R W H X Q L W , Q P P

