

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

Applications

- DC/DC Converters
- AC/DC Adaptors
- Switching Power Supplies
- Freewheeling Diodes

Maximum ratings and electrical characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)




Parameter	Symbol	Limit		Unit
Maximum repetitive peak reverse voltage	VRRM	100		V
Maximum average forward rectified current per device	IF(AV)	10		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load per diode	IFSM	1 0		A
Operating junction and storage temperature range	T_J , TSTG	-55 to +150		
Typical thermal resistance per leg	TO-220AB	2		$^\circ\text{C/W}$
	ITO-220AB			
Instantaneous forward voltage per diode		TYP.	MAX.	
	IF=3A	$T_J=25^\circ\text{C}$	0.45	V
	IF=3A	$T_J=125^\circ\text{C}$	0.39	
	IF=10A	$T_J=25^\circ\text{C}$		
	IF=10A	$T_J=125^\circ\text{C}$	0.55	
Instantaneous reverse current per diode at rated reverse voltage	$T_J=25^\circ\text{C}$	IR(2)	50	uA
	$T_J=125^\circ\text{C}$		5	- mA

Notes:


(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms


RATINGS AND CHARACTERISTICS CURVES ($T_A = 25^\circ\text{C}$ unless otherwise noted)

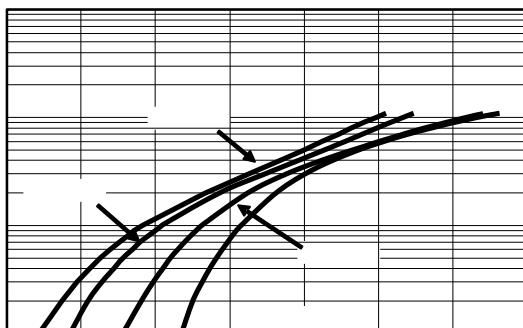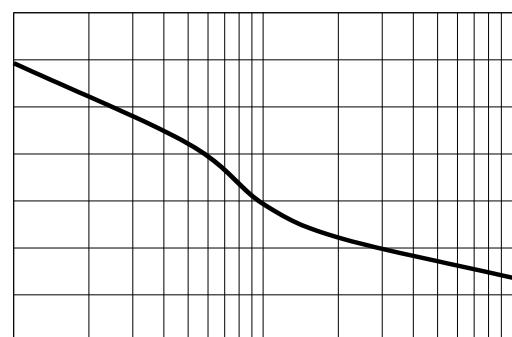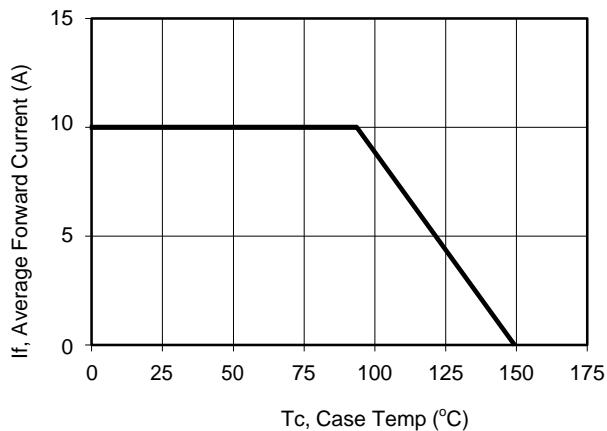


PACKAGE OUTLINE DIMENSIONS

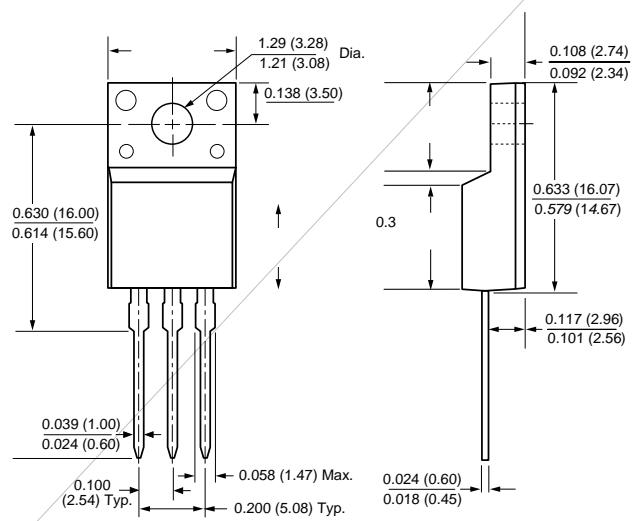

Marking Information

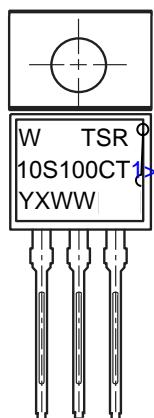


- ① W : Company's trademark
- ② Product model : TSR10S100CT or TSR10S100CTF
- ③ PDC information

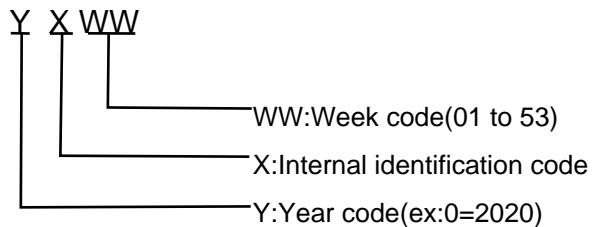


Packaging Information

1. Tube Dimensions

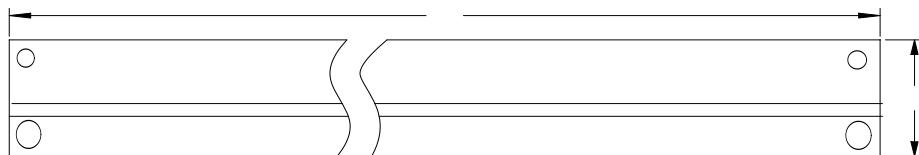

2. Inside Box

3. Outside Box



Packaging Information

NO	UNIT	Tube Dimensions			Inside Box			Outside Box		
		A	B	C	L1	W1	H1	L2	W2	H2
Size	mm	530	7	33	570	46	150	590	260	180
		50PCS/Tube			Smallest package, 1000PCS, 20 tube in total			5,000PCS/carton, 5 boxes in total		
Note	Tolerance 20mm, ±3mm; 21-100mm, ±5mm; 101-500mm, ±10mm									