

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA /



Cathode ← Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHS SOLHV
- ‡)UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXSHVSHUNYHYURQWDJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUUHQW VLKDDHQZDYH VXSHULP&QNDVGRS&GLRGH		,) 60	5	\$
2SHUDMXQEDVLRQWRUDJH WHPSHUDW		X0H767°C JH	0WR50	f &
7\SLFDO WIKHULP&DQFH	'2 \$'	5\$-&		f & :
,QVWDQWDQHRROWRDUG SHGLRGH	,) \$	7- f &	7 < 3	9
	,) \$	7- f &	0\$;	
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHQWIRQW UDWHYHYURQWDJH	7- f &	,5		X\$
	7- f &			X\$

1RWHV


3XOVH WHV&XOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPWH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES


7\$

f & XQOHVQRWKBUZLVH

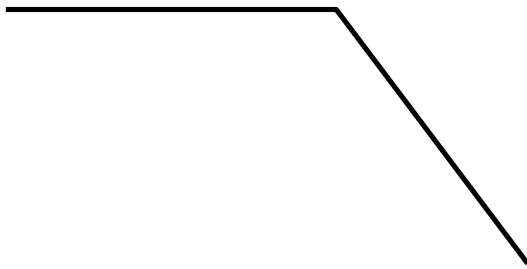


7F & DVH 7&HPS

3 HD)NR UZ D6UXGJ &HX U U \$ QW

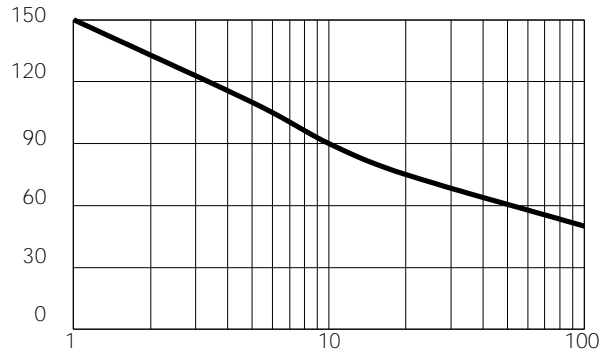

1REU RI&OHV DW }-

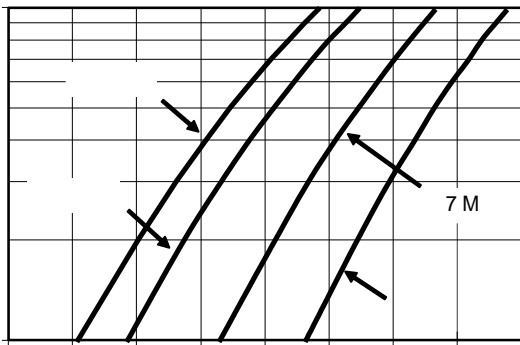


91 ,QVWDQWDQHRXV)RUZDUG 9ROWDJH P9 95 5HYHUVH 9ROWDJH 9ROWV



PACKAGE OUTLINE DIMENSIONS



DO-201AD

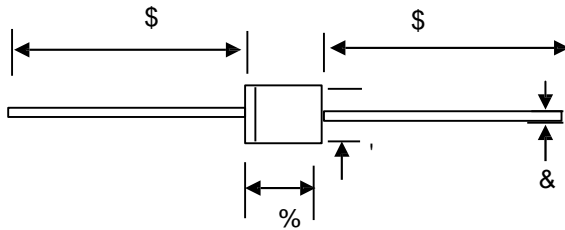

'2 \$' P H F K D Q L F W O

UNIT		\$	%		
P P	max			4	
	min			1	
P L O	max				
	min				


Marking Information

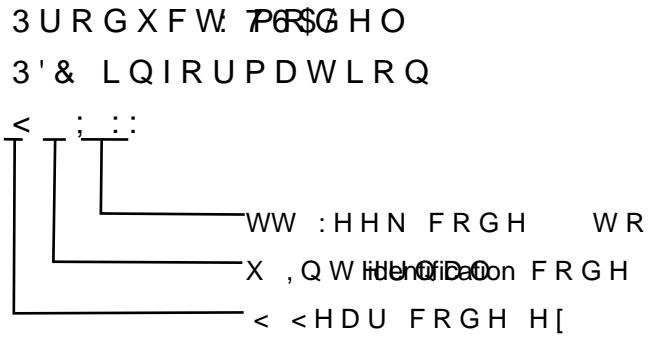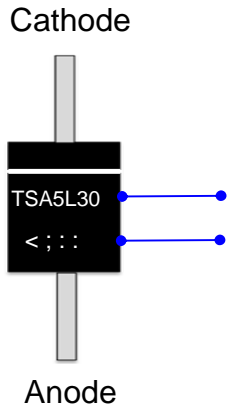

Packaging Information

1. Inside Box

2. Outside Box

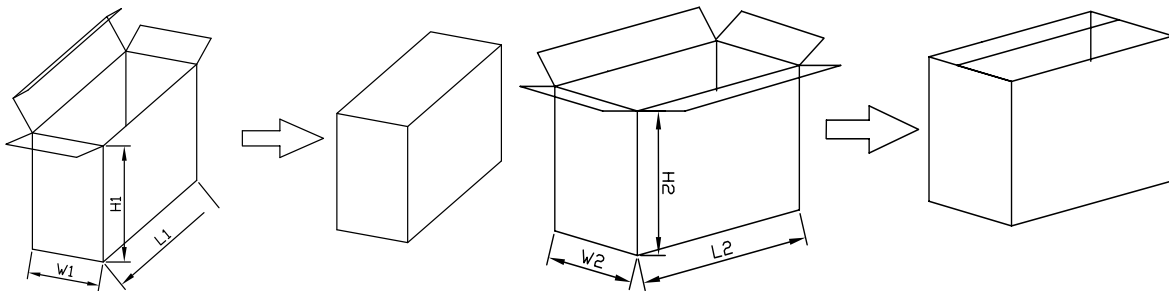

Packaging Information

NO	UNIT	Inside Box			Outside Box		
		L1	W1	H1	L2	W2	H2
Size	mm	255	75	11	210		320
QTY	PCS	Smallest package, 1000PCS/carton			10,10		