


Features

DO-201AD

TSA /



Applications



Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

| | | () | | |
|--|--|-----|--|--|
| | | | | |
| | | | | |
| | | () | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | () | | |
| | | | | |


() %

()


()

RATINGS AND CHARACTERISTICS CURVES


()

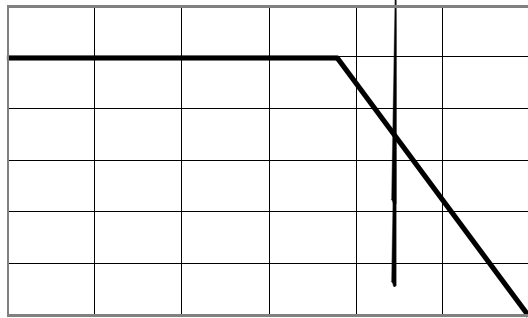

()

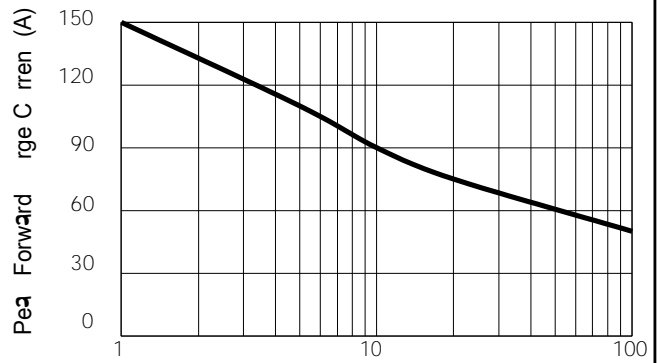


()

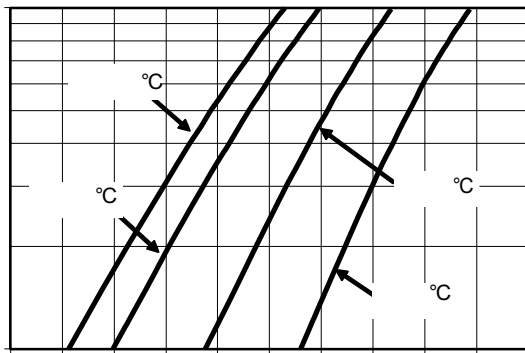


()

()

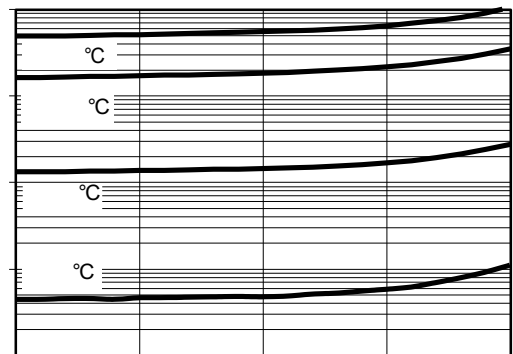

()


()

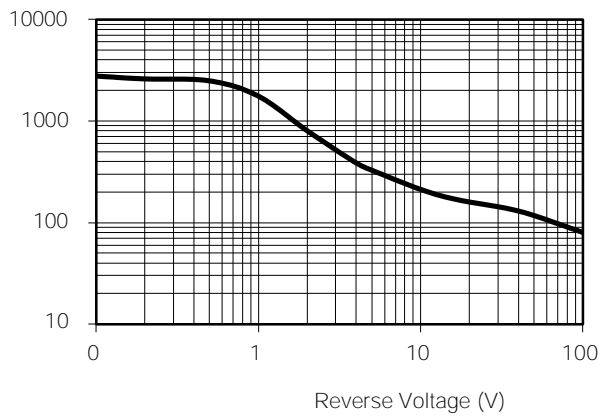

()



PACKAGE OUTLINE DIMENSIONS

DO-201AD

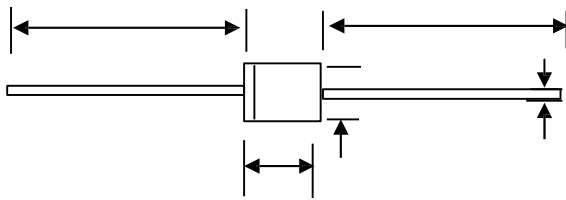

| | | | | C | |
|--|--|--|--|-----|--|
| | | | | 1.4 | |
| | | | | 1.1 | |
| | | | | 5.1 | |
| | | | | | |


Marking Information



()

()

Packaging Information

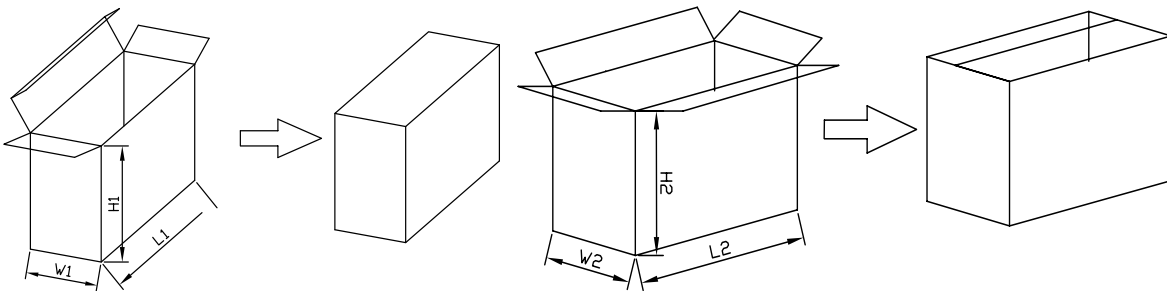

Packaging Information



4