

# TS \$3L

19-NOV-201 SD 11H

7 U H Q F K 0 2 6 % D U U L H U 6 F K R W W N \ 5 H

### Features

‡ \$ G Y D Q W H G W F K K Q R O I  
 ‡ / R Z I R U Z D Y R G V G D J R S  
 ‡ / R Z S R Z I U R V V H V  
 ‡ + L J K I I L F L R I S F U D W L R C  
 ‡ / H D J G H H L Q L S R K + & R P S C

### Applications

‡ ' & ' & R Q Y H  
 ‡ \$ & ' & G D S W

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)






3 D U D P H W H U	6 \ P E R	/ L P L W	8 Q L
0 D [ L P X P H S H V S I H W L N Y Y I H Y R / O W D J H	9 5 5 0		9
0 D [ L P X P Y H U D R J W Z D W I G W F L X I U H G I Q W 3 H D N	) \$ 9		\$

1 R W H V

3 X O W H H V W V S X O Z I H G W K G X W \ F

3 X O W H H 3 X O Z I H G W K P V

## RATINGS AND CHARACTERISTICS CURVES

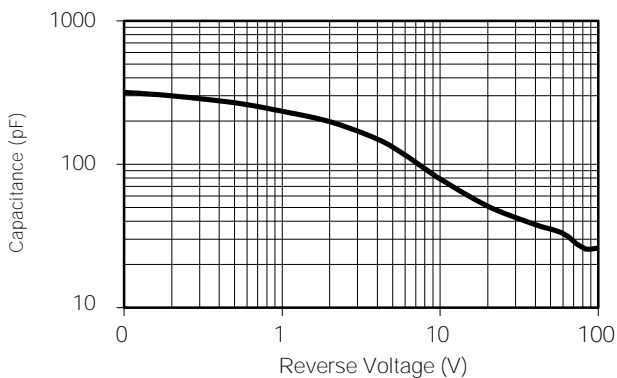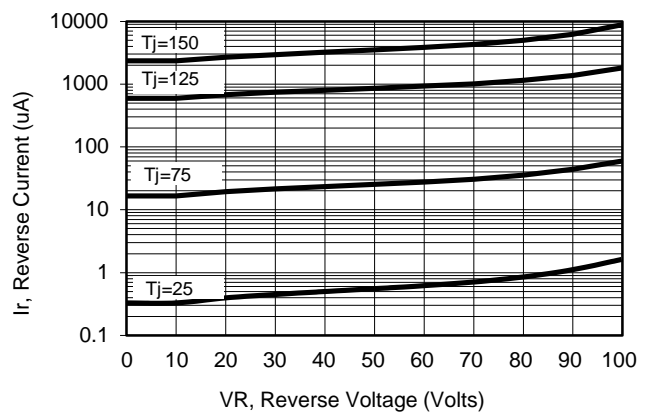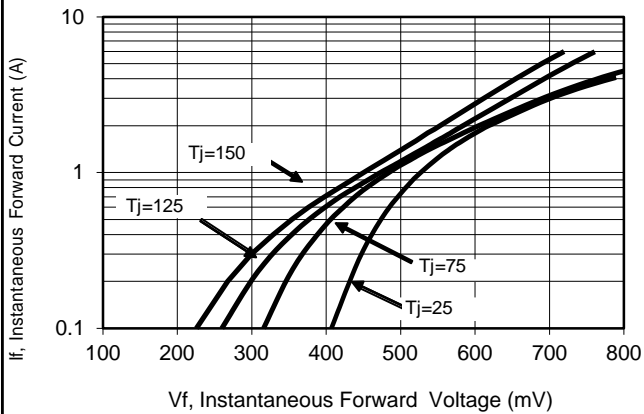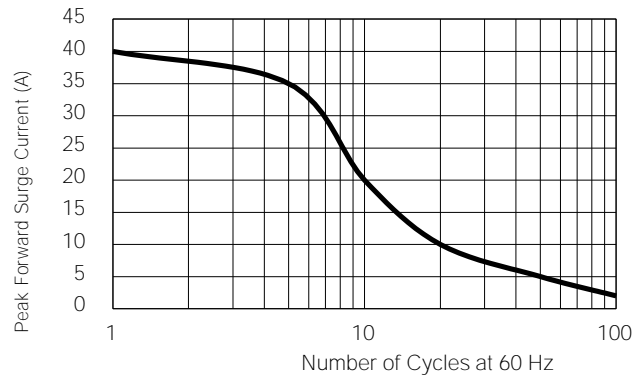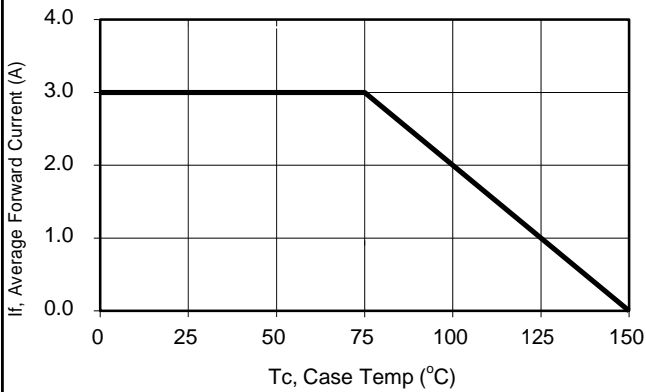

## PACKAGE OUTLINE

'2 GLPHQVLRQV

